

SHEET METAL OR MEMBRANE COATED METAL EDGE FLASHING (AS REQUIRED BY MANUFACTURER)

SEALANT (IF REQUIRED BY THE SPECIFIC SYSTEM)

FLASHING MEMBRANE

FASTENERS AT APPROX. 3" O.C., DO NOT STAGGER

INSULATION

GUTTER SPACER ALTERNATELY SPACED FROM BRACKETS  
OPTIONAL: TURN-DOWN

EXIST. ROOF DECK


WOOD NAILERS (ADD AS REQ'D. TO MEET HGT. OF NEW ROOF SYSTEM)

EXTEND FIELD SHEET OR A SEPARATE MEMBRANE SHEET TO OVERLAY METAL CLOSURE

GUTTER BRACKET SUPPORT AT 12" TO 36" O.C. DEPENDING UPON CONDITIONS

CONTINUOUS SHEET METAL CLOSURE FASTENED APPROX. 18" O.C.

SHEET METAL GUTTER

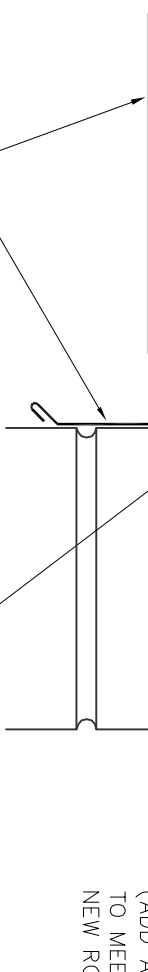

PROJECT TITLE :

ROOF RECOVERY

2015

JOB NO.,

DRAWN BY :

CHECKED

SCALE

DATE


CAD FILE

SHEET

3/25/2015

DRAWING NO.

d0003



GUTTER