

SHEET METAL OR MEMBRANE COATED METAL EDGE FLASHING (AS REQUIRED BY MANUFACTURER)

SEALANT (IF REQUIRED BY THE SPECIFIC SYSTEM)

FLASHING MEMBRANE

FASTENERS AT APPROX. 3" O.C., DO NOT STAGGER

SINGLE PLY ROOF MEMBRANE

EXIST. ROOF MEMBRANE

EXIST. INSULATION

CONTINUOUS CLEAT
GUTTER SPACER
ALTERNATELY SPACED
FROM BRACKETS
OPTIONAL:
TURN-DOWN

SHEET METAL GUTTER

WOOD
NAILERS


EXIST. ROOF
DECK

RECOVERY BOARD

CONTINUOUS SHEET
METAL CLOSURE
FASTENED APPROX. 18"
O.C.

EXTEND FIELD SHEET OR
A SEPARATE MEMBRANE
SHEET TO OVERLAY
METAL CLOSURE

GUTTER BRACKET
SUPPORT AT 12" TO
36" O.C. DEPENDING
UPON CONDITIONS

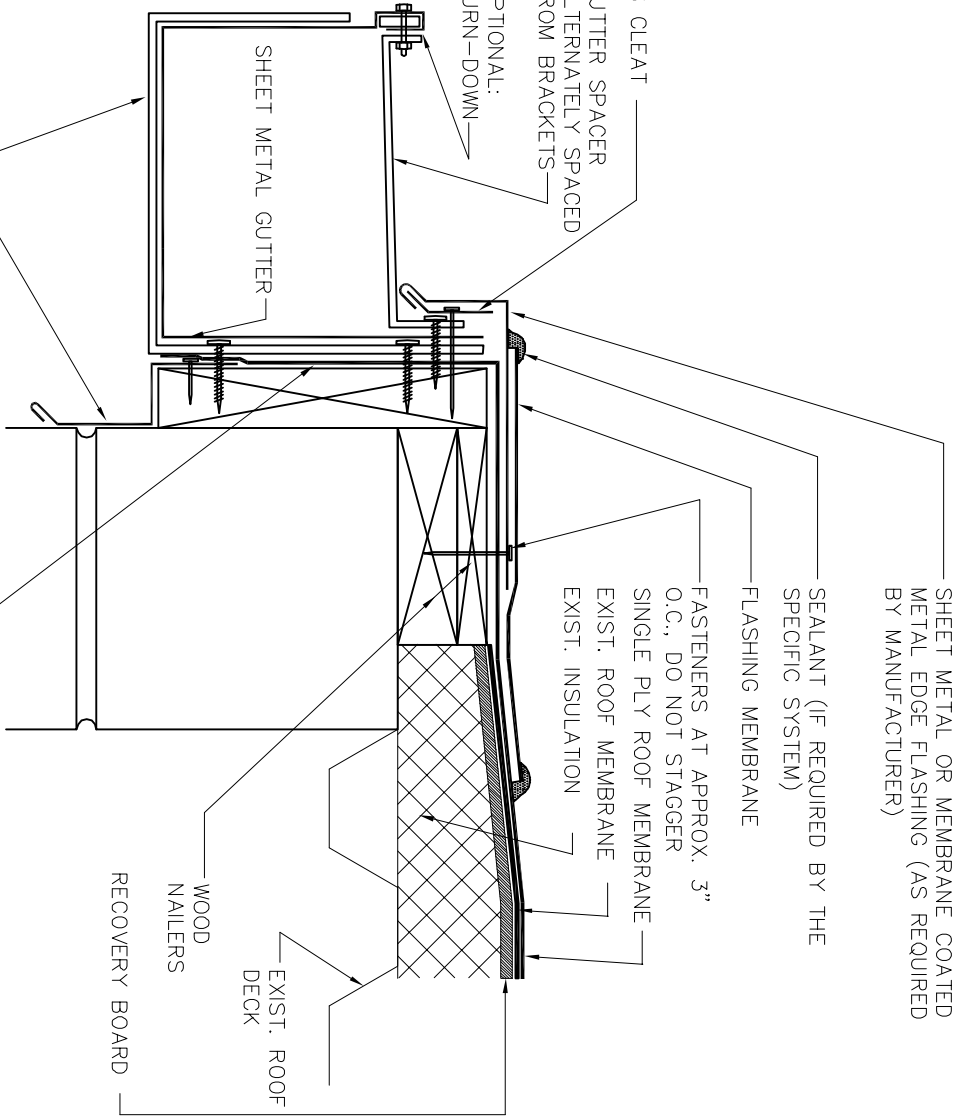

PROJECT TITLE :


ROOF RECOVERY

2014

JOB NO.,	
DRAWN BY :	
CHECKED	
SCALE	
DATE	8/7/2014
CAD FILE	
SHEET	

DRAWING NO.

d001



GUTTER